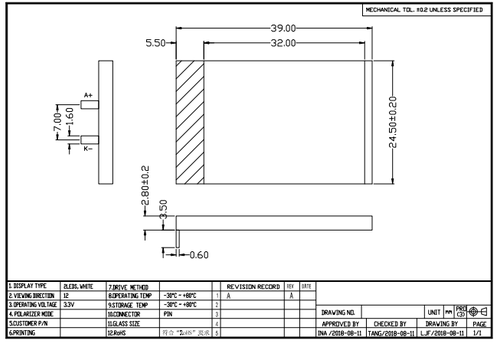

					REVISSION RECORD	REV	DATE
1.DISPLAY TYPE	2LEN, WHITE	7.DRIVE METHED		1	A	A	
2.VIEWING DIRECTION	12	8.OPERATING TEMP	-30°C ~ +80°C	2			
3.OPERATING VOLTAGE	3.3V	9.STORAGE TEMP	-30°C ~ +80°C	3			
4.POLARIZER MODE		10.CONNECTOR	PIN	4			
5.CUSTOMER P/N		11.GLASS SIZE		5			
6.PRINTING		12.RoHS	符合"2002/95/EC"指令				

DRAWING NO.		UNIT	mm	PAGE
APPROVED BY	CHECKED BY	DRAWING BY		PAGE
DNA /2018-08-11	TANG/2018-08-11	L.F /2018-08-11		1/1

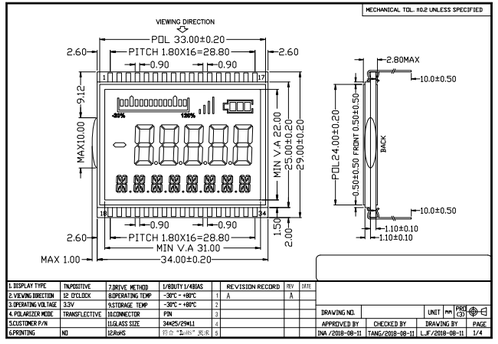

					REVISSION RECORD	REV	DATE
1.DISPLAY TYPE	TN/POSITIVE	7.DRIVE METHED	1/8DUTY 1/4BIAS	1	A	A	
2.VIEWING DIRECTION	12 O'CLOCK	8.OPERATING TEMP	-30°C ~ +80°C	2			
3.OPERATING VOLTAGE	3.3V	9.STORAGE TEMP	-30°C ~ +80°C	3			
4.POLARIZER MODE	TRANSFLECTIVE	10.CONNECTOR	PIN	4			
5.CUSTOMER P/N		11.GLASS SIZE	34425/29411	5			
6.PRINTING	NO	12.RoHS	符合"2002/95/EC"指令				

DRAWING NO.		UNIT	mm	PAGE
APPROVED BY	CHECKED BY	DRAWING BY		PAGE
DNA /2018-08-11	TANG/2018-08-11	L.F /2018-08-11		1/4

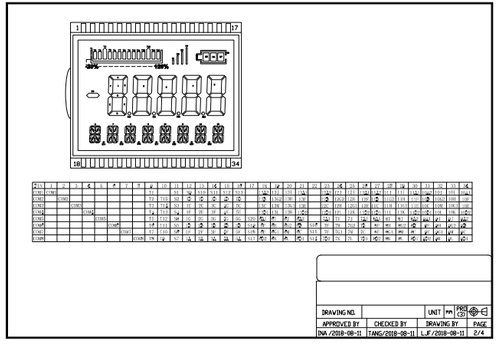

DRAWING NO.		UNIT	mm	PAGE
APPROVED BY	CHECKED BY	DRAWING BY		PAGE
DNA /2018-08-11	TANG/2018-08-11	L.F /2018-08-11		2/4

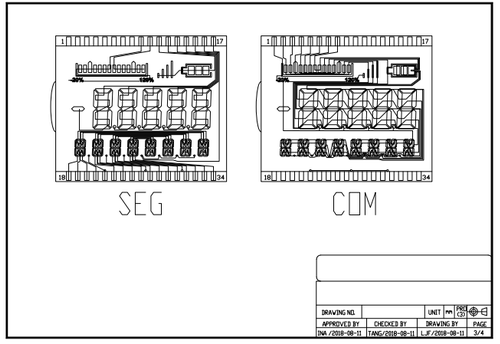

DRAWING NO.		UNIT	mm	PAGE
APPROVED BY	CHECKED BY	DRAWING BY		PAGE
DNA /2018-08-11	TANG/2018-08-11	L.F /2018-08-11		3/4

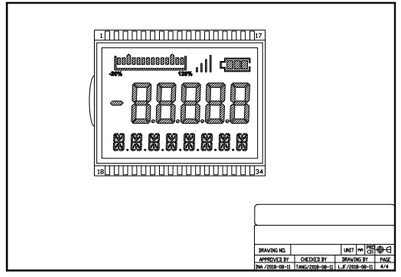

DRAWING NO.		UNIT	mm	PAGE
APPROVED BY	CHECKED BY	DRAWING BY		PAGE
DNA /2018-08-11	TANG/2018-08-11	L.F /2018-08-11		4/4