



PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
--	COM1	COM2	COM3	SEG1	SEG2	SEG3	SEG4	SEG5	SEG6	SEG7	SEG8	SEG9	SEG10	SEG11	SEG12	SEG13	SEG14	SEG15	SEG16	SEG17	SEG18	SEG19	SEG20	SEG21	SEG22	SEG23
COM1	COM1	--	--	S7	S1	S2	S3	S34	S35	S36	S37	S38	S32	S39	S40	S67	S11	S60	S6	S10	S53	S5	S4	S45	S9	S43
COM2	--	COM2	--	S14	S12	S13	S8	S28	S29	S30	S31	S23	S25	S33	S41	S68	S61	S66	S65	S54	S59	S58	S46	S51	S50	S42
COM3	--	--	COM3	S17	S15	S18	S16	S19	S20	S21	S52	S24	S22	S26	S27	S69	S62	S63	S64	S55	S56	S57	S47	S48	S49	S44

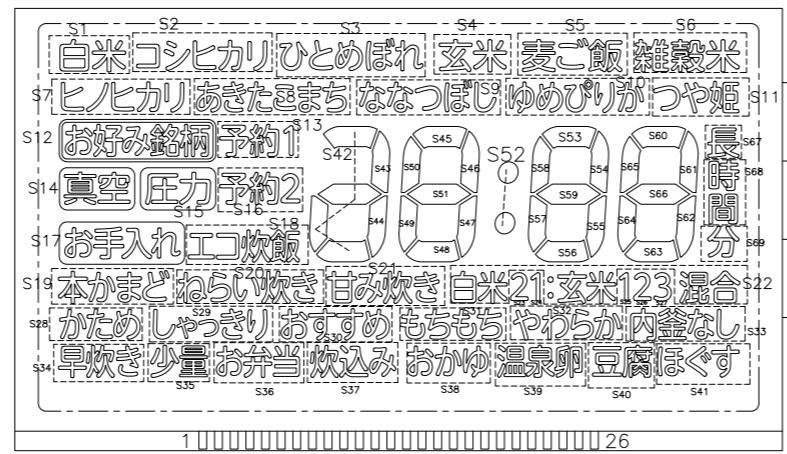

1. DISPLAY TYPE	■TN □HTN □STN □FSTN	5. OPERATING TEMP	-10° C TO 70° C
2. POLARIZER MODE	TRANSMISSIVE/NEGATIVE	6. STORAGE TEMP	-20° C TO 80° C
3. DRIVE CONDITION	1/3DUTY 1/3BIAS 3.0V	7. CONNECTOR	PIN
4. VIEWING DIRECTION	6 0° CLOCK	8. CUSTOMER P/N	

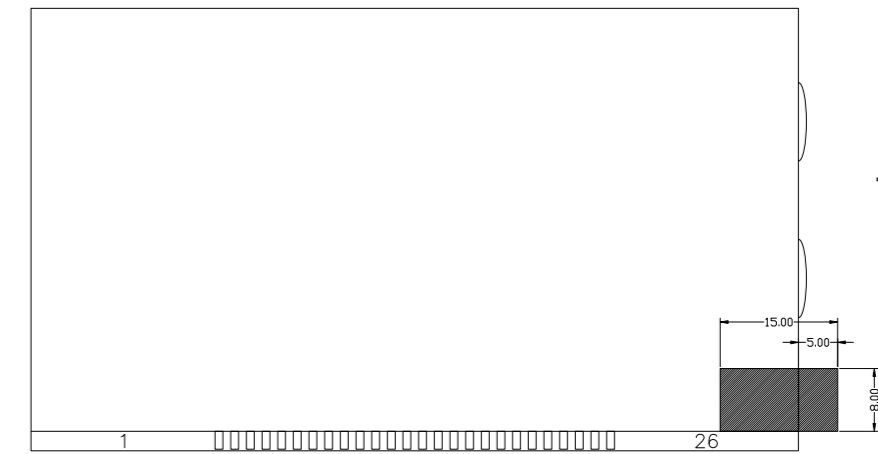

面偏光片保护膜易撕贴
(易撕贴颜色: 绿色)



显示效果图