
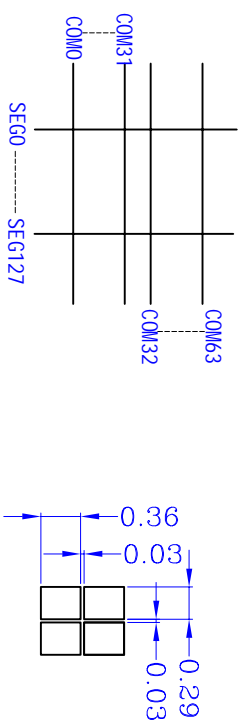
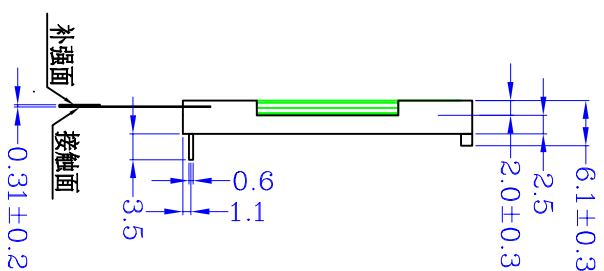


1	NC
2	/CS
3	/RST
4	A0
5	/WR(R/W)
6	/RD(R)
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6(sect)
14	DB7(sect)
15	VDD
16	VSS
17	VOUT
18	C3P
19	C1N
20	C1P
21	C2P
22	C2N
23	V4
24	V3
25	V2
26	V1
27	V0
28	C86
29	P/S
30	NC

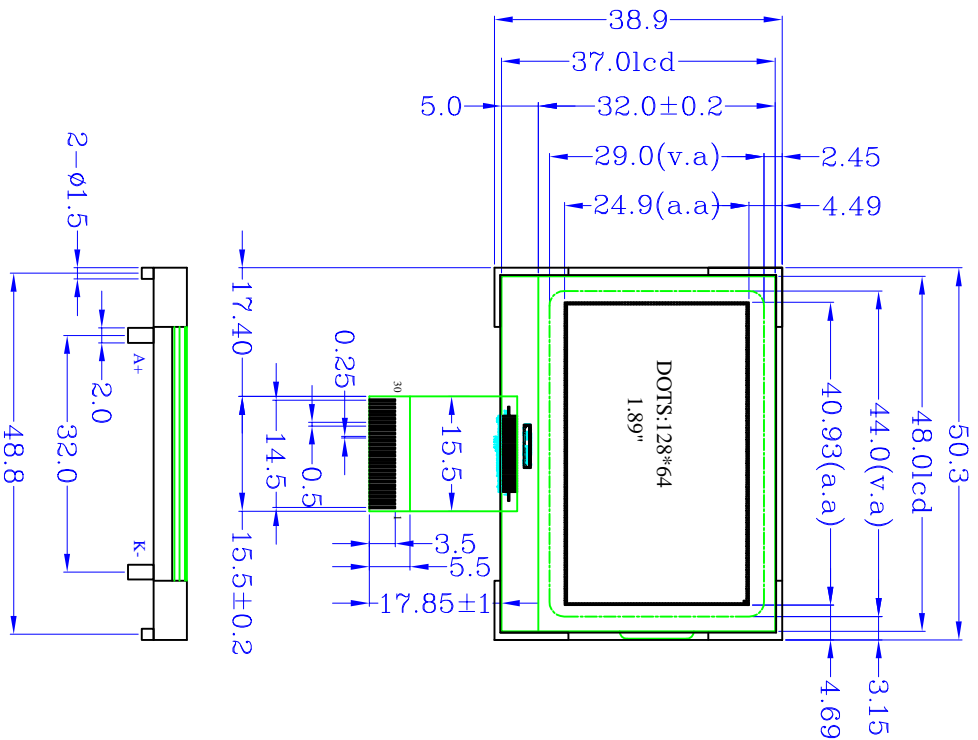

- NOTES:
1. DISPLAY TYPE: FSTN
 2. POLARIZER TYPE: TRANSPARENT, POSITIVE
 3. VIEW DIRECTION: 6:00
 4. OPERATING TEMPERATURE: -20°C~+70°C
 5. STORAGE TEMPERATURE: -30°C~+80°C
 6. VDD: +3.3V
 7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
 8. CONTROLLER: ST7565R
 9. BACKLIGHT TYPE: WHITE
 10. BACKLIGHT SUPPLY VOLTAGE: 3.0V

WAYING (HONGKONG) SHARES LIMITED		DESIGN:	MODEL NUMBER:	UNITS:	MM
		CHECK:	WYM12864K1301G	VERSION:	A
APPROVE:			SHEET:	1 OF 1	
Unspecified tolerances are ±0.3			DATE:	2017-08-31	