
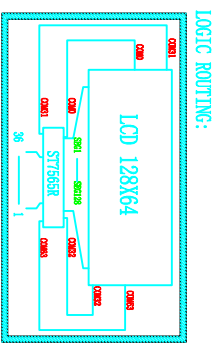



PIN FUNCTION:

PIN	DISC	PIN	DISC
1	NC	19	C+
2	NC	20	C-
3	/CSL	21	C+
4	/RS	22	C+
5	A0	23	C-
6	R/W	24	NC
7	E/R0	25	V4
8	D1	26	V3
9	D1	27	V2
10	D2	28	V1
11	D3	29	V0
12	D4	30	VR
13	D5	31	NC
14	D6	32	OS6
15	D7	33	P/S
16	VDD	34	NC
17	VSS	35	RES
18	VOUT	36	NC



LOGIC ROUTING:

PIN	DISC	PIN	DISC
1	NC	19	C+
2	NC	20	C-
3	/CSL	21	C+
4	/RS	22	C+
5	A0	23	C-
6	R/W	24	NC
7	E/R0	25	V4
8	D1	26	V3
9	D1	27	V2
10	D2	28	V1
11	D3	29	V0
12	D4	30	VR
13	D5	31	NC
14	D6	32	OS6
15	D7	33	P/S
16	VDD	34	NC
17	VSS	35	RES
18	VOUT	36	NC

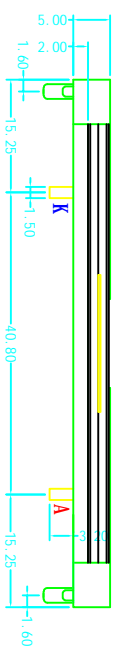

- NOTES:
1. DISPLAY TYPE: FSTN
 2. POLARIZER TYPE: TRANSPARENT, POSITIVE
 3. VIEW DIRECTION: 6:00
 4. OPERATING TEMPERATURE: -20°C~+70°C
 5. STORAGE TEMPERATURE: -30°C~+80°C
 6. VDD: +3.3V
 7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
 8. CONTROLLER: ST766BR
 9. BACKLIGHT TYPE: WHITE
 10. BACKLIGHT SUPPLY VOLTAGE: 3.0V

WAYING (HONGKONG) SHARES LIMITED		DESIGN:	MODEL NUMBER: WYM12864K168G
		CHECK:	
APPROVE:		UNITS:	MM
Unspecified tolerances are ±0.3		VERSION:	A
		SHEET:	1 OF 1
		DATE:	2019-03-18