REV	REVISION RECORD	DATE
1	ACCORDING TO CUSTOM'S SPEC	2010-06-01
2	更改FPC长度为40mm	2010-06-03

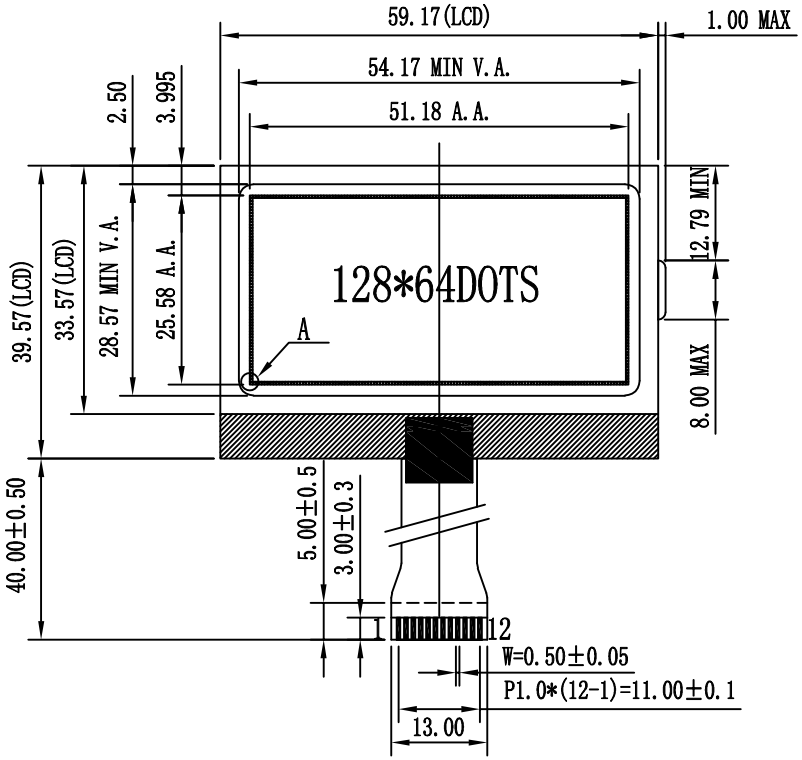

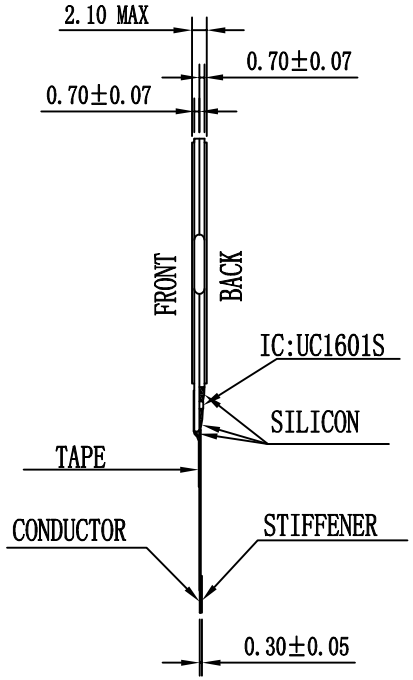

FUNCTION TABLE:

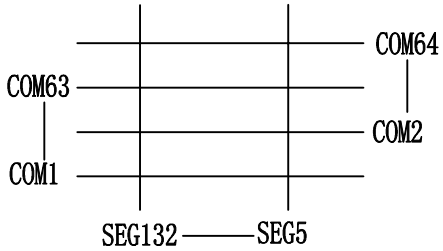



NO.	SYMBOL
12	VLCD
11	VBO-
10	VBO+
9	VB1-
8	VB1+
7	VSS
6	VDD
5	SDA
4	SCK
3	CD
2	RST
1	CS0

CONFIRM ALL TYPE DRAWINGS OF THIS AND PASS BACK!

OPERATING VOLTAGE: 3.0V	OPERATING CURRENT:1.0mA MAX
DISPLAY TYPE: FSTN/POSITIVE	POLARIZER MODE: TRANSFLECTIVE
LCD DRIVE METHOD: 1/65DUTY 1/9BIAS 9.0V	VIEW DIRECTION: 6:00 O'CLOCK
LCD DRIVER IC: UC1601S	BACK LIGHT:—
OPERATING TEMPERATURE: -20℃ TO 70℃	STORAGE TEMPERATURE: —30℃ TO 80℃
DEFAULT TOLERANCE: ±0.2	ROHS STANDARD: YES

WAYING (HONGKONG) SHARES LIMITED

TITLE	模块外形图	CUSTMER NUMBER	-	REV	B
DES'D BY	高 翔	PRODUCT MODEL	WYM12864K23G	UNIT	mm
CHK'D BY		SERIAL NUMBER	-	DATE	2010-06-03
APPROVED		SCALE	1:1	NO.	1/1