
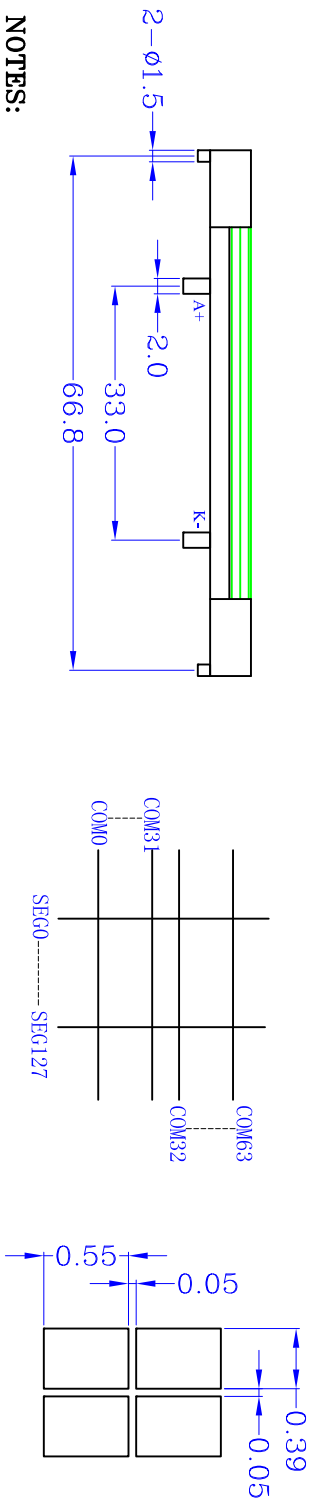
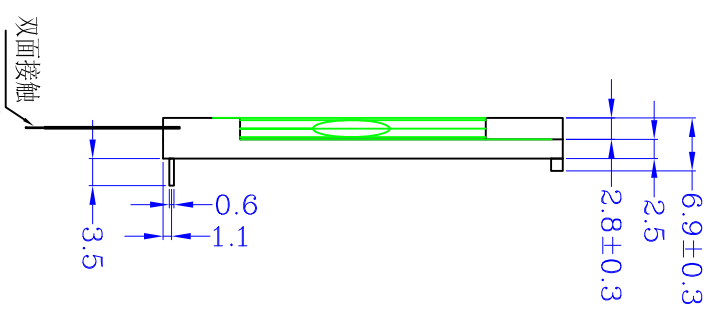


1	VSS
2	/CS
3	/RST
4	A0
5	/WR(R/W)
6	/RD(S)
7	VDD
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6(sct)
15	DB7(sct)
16	VDD
17	VSS
18	V0
19	XV0
20	VG
21	VSS
22	C86
23	P/S
24	VDD
25	VSS

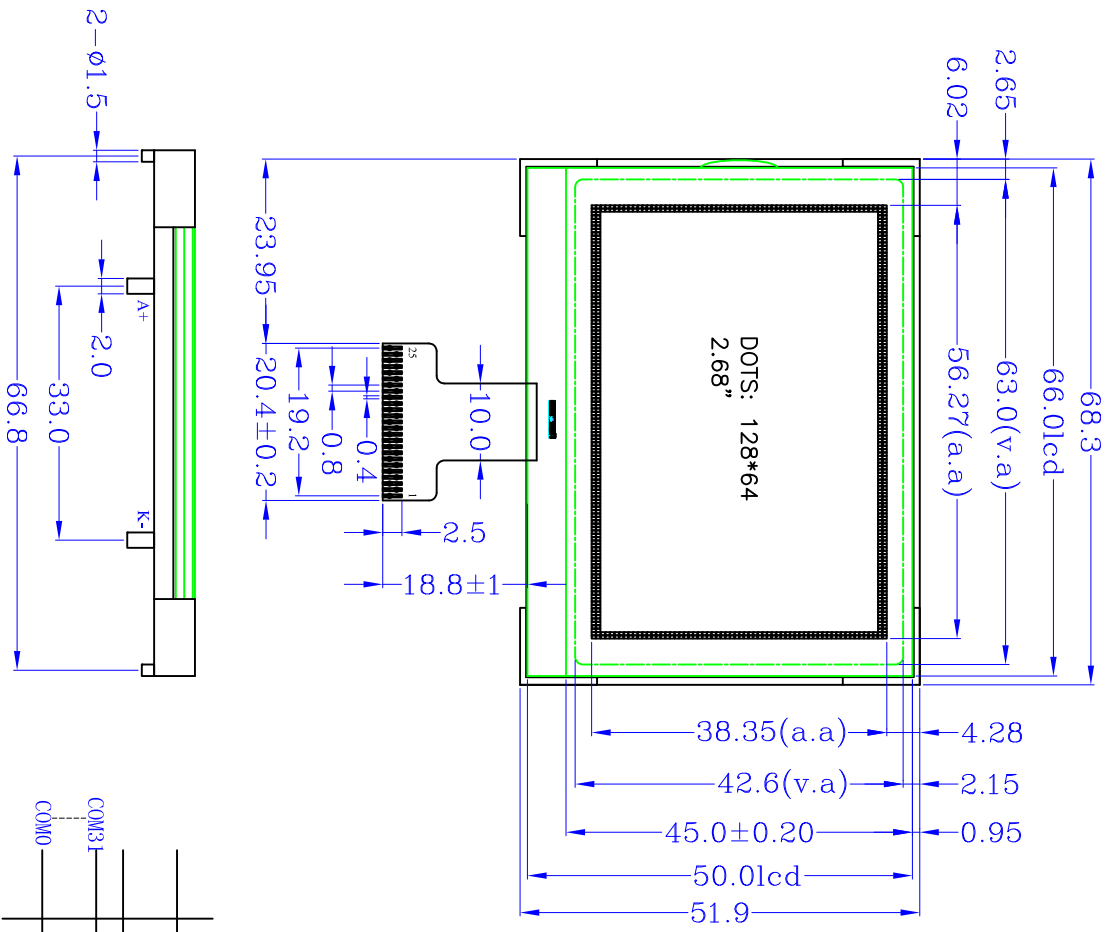

- NOTES:
1. DISPLAY TYPE: STN,YELLOW-GREEN
 2. POLARIZER TYPE: TRANSPARENT, POSITIVE
 3. VIEW DIRECTION: 12:00
 4. OPERATING TEMPERATURE: -20°C~+70°C
 5. STORAGE TEMPERATURE: -30°C~+80°C
 6. VDD: +3.3V
 7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
 8. CONTROLLER: ST7567
 9. BACKLIGHT TYPE: WHITE
 10. BACKLIGHT SUPPLY VOLTAGE: 3.0V

		WAYING (HONGKONG) SHARES LIMITED	
DESIGN:	MODEL NUMBER:	UNITS:	MM
CHECK:	WYM12864K29G	VERSION:	A
APPROVE:		SHEET:	1 OF 1
Unspecified tolerances are ±0.3			DATE: 2013-06-06