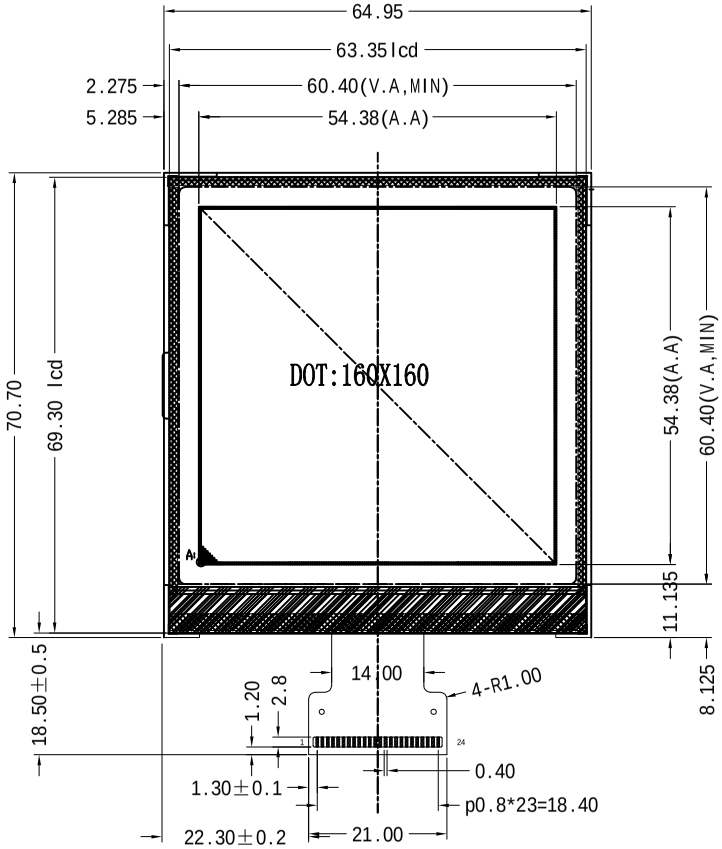

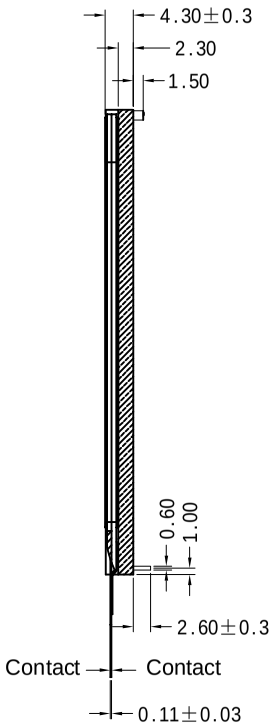

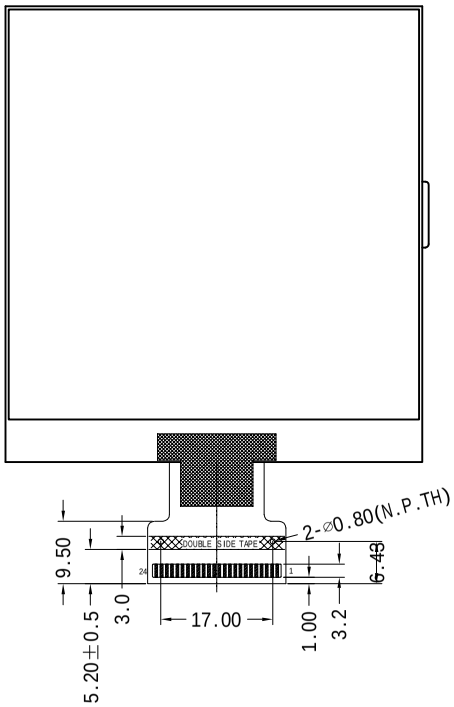

1.DISPLAY TYPE: FSTN
2.VIEWING DIRECTION: 6:00
3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4.IC: UC1698U
5.OPERATING TEMP: -20° C-+70° C
6.STORAGE TEMP: -30° C-+80° C
7.Drive Mothod: 1/160duty 1/10bias
8.LCD OPERATING VOLTAGE: 16.5V
RECOMMEND VDD= 3.3V
9.BACKLIGHT: Without
10.CONNECTOR: FPC
11.UNMARKED TOLERANCES: ±0.3mm
12.THE CONTROLLED DIMENSION MASK TO BE
13.REQUIREMENT ON ENVIRONMENTAL PROTECTION: RoHS



DETAIL A:(10:1)

PIN	1	2	3	4	5	6	7	8	9	10	11	12
SYMBOL	VLCD	VS+	VS-	VB0-	VB1-	VB1+	VB0+	VDD	VSS	TST4	BM0	CS0
PIN	13	14	15	16	17	18	19	20	21	22	23	24
SYMBOL	CD	WR1	WR0	RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

WAYING（HONGKONG） SHARES LIMITED

DRAWN BY:	TITLE: WYM160160B21G	
ME CHECKED BY:		
EE CHECKED BY:	DWG NO: G-1	UNIT: mm
APPROVED BY:	SCALE:	SHEET NO: 1 OF 1