
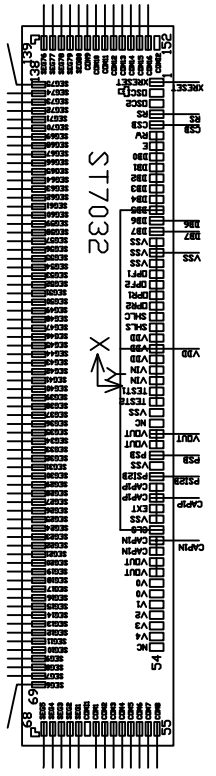
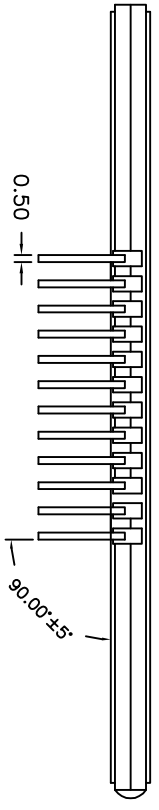
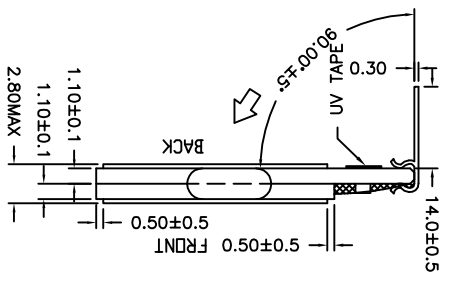




VER	DETAIL DESCRIPTION	DATE
△	The First Amendment	2016-02-22

客户确认签名/  
Customer signature

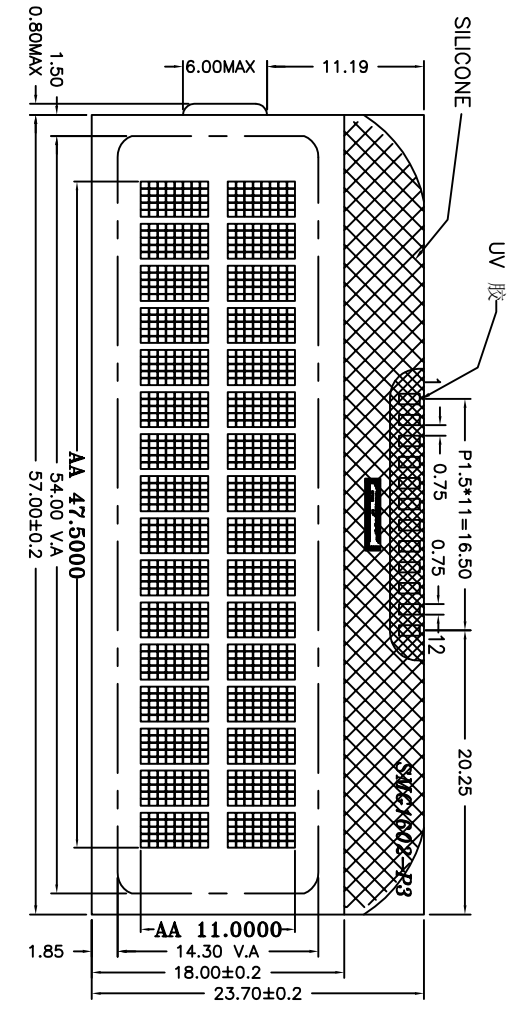

PIN ASSIGNMENT :	??:??????
1	XREST P.3.0
2	RS P.3.1
3	CSB P.3.2
4	SCL P.1.6
5	SDA P.1.7
6	VSS
7	VDD +3.0V
8	VOUT
9	PSB
10	PS12B +3.0V
11	CAP1P C=1UF
12	CAP1N

ITEM	PARAMETERS	ITEM	PARAMETERS
OPERATING VOLTAGE	3.3V	OPERATING TEMP	-20°C ~ 70°C
OPERATING CURRENT	1.0MA (MAX)	STORAGE TEMP	-30°C ~ 80°C
LCD DRIVE VOLTAGE	5.6V	ROHS STANDARD	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
DISPLAY MODE	D-FSTN NEGATIVE, TRANSMISS	CONNECTOR TYPE	FF PIN
LCD DRIVE METHOD	DUTY?1/16; BIAS?1/4	BKL Type	---
Driver/Controller	ST7032	DEFAULT TOLERANCE	E.2
VIEW DIRECTION	6:00 O'CLOCK		

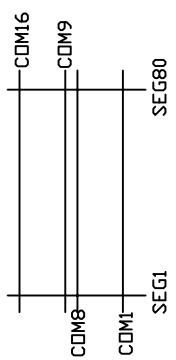

南京罗姆液晶显示技术有限公司

名称	CDG工程图
编号	W/YM1602K3G
版本	1.0
绘图	PGY
审批	YXS
日期	2016 02 22