




REV	REVISION RECORD	DATE	NAME

DOTS FUNCTION TABLE:

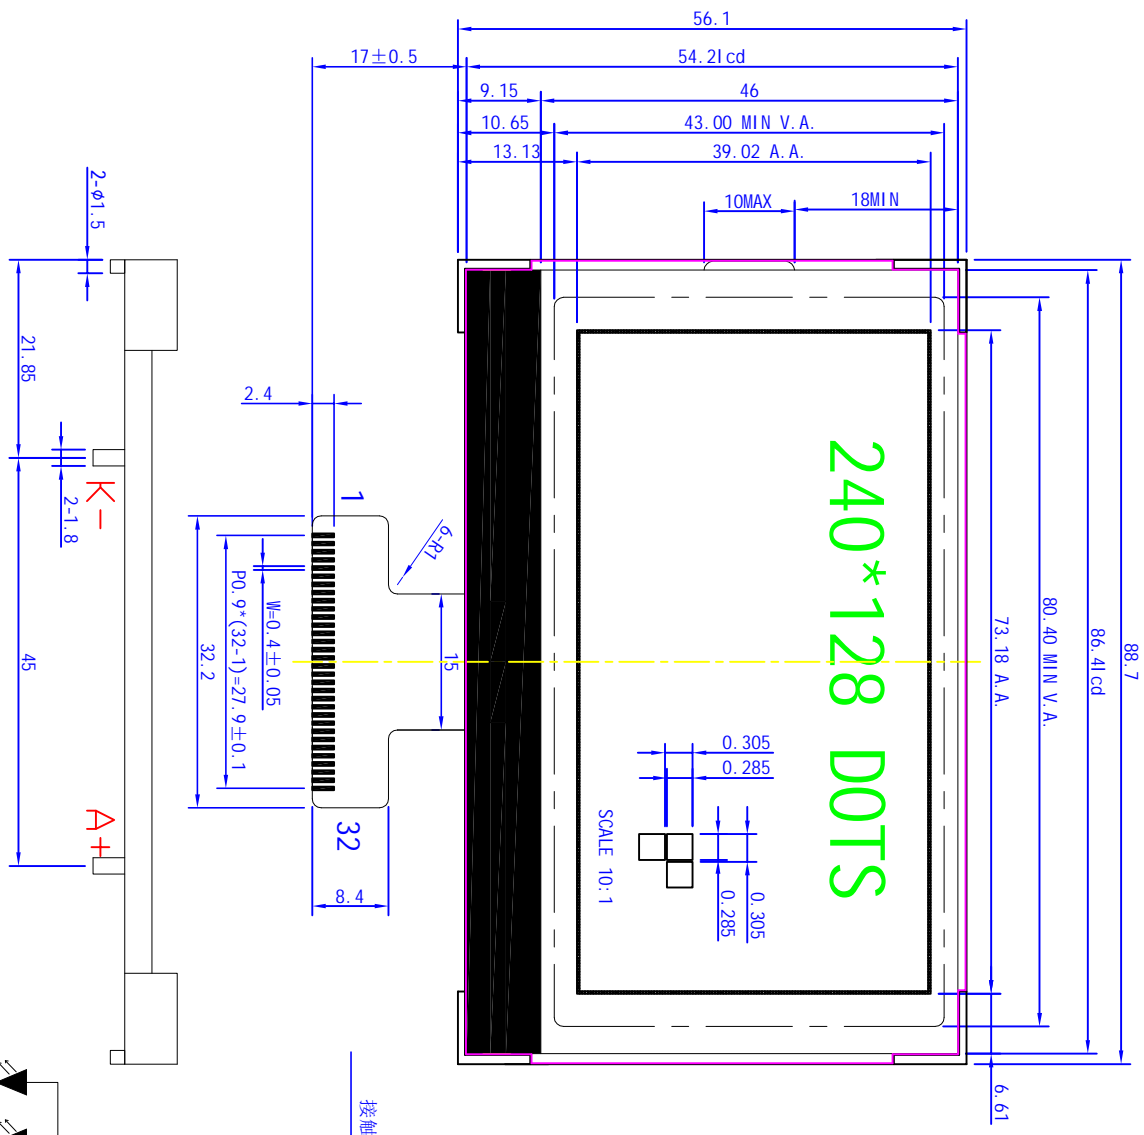


32	NC	16	BM0
31	NC	15	BM1
30	D7	14	TRESET4
29	D6	13	VSS
28	D5	12	VDD
27	D4	11	VDD23
26	D3	10	VBO+
25	D2	9	VB1+
24	D1	8	VB1-
23	D0	7	VBO-
22	RST	6	VS-
21	WR	5	VS+
20	RD	4	VLCD/IN
19	A0	3	VLCD/OUT
18	CS0	2	NC
17	CS1	1	NC
NO.	SYMBOL	NO.	SYMBOL

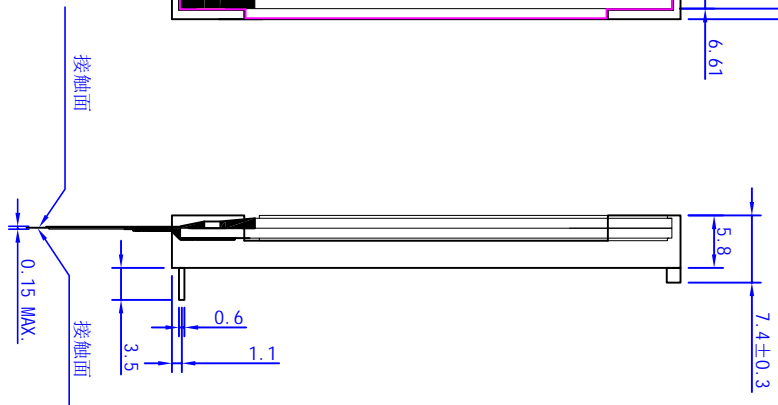

CONFIRM ALL TYPE DRAWINGS OF THIS AND PASS BACK!

OPERATING VOLTAGE: 3.0V	OPERATING CURRENT: --
DISPLAY TYPE: STN-BLUE/NEGATIVE	POLARIZER MODE: TRANSMISSIVE
LCD DRIVE METHOD: 1/128DUTY 1/128IAS 16.0V	VIEW DIRECTION: 6:00 O'CLOCK
LCD DRIVER I.C.: UC16980	BACK LIGHT: 3.0V
OPERATING TEMPERATURE: -20°C TO 70°C	STORAGE TEMPERATURE: -30°C TO 80°C
DEFAULT TOLERANCE: ±0.2	ROHS STANDARD: YES



WAYING (HONGKONG) SHARES LIMITED		TITLE	模块外形图	CUSTOMER NUMBER	
		DES'D BY	赵涛	PRODUCT MODEL	WVW240128K10G
CHK'D BY		SERIAL NUMBER		SCALE	1:1
APPROVED					
		REV		UNIT	mm
		DATE	2013-03-17		1/1