
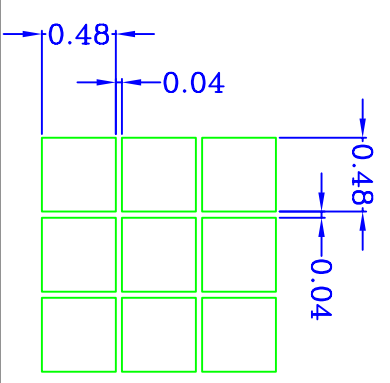
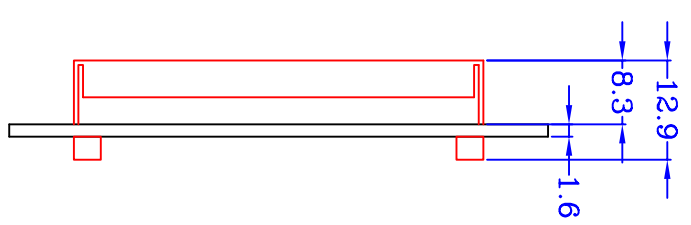


1	VSS	Power ground
2	VDD	Power supply (+5V)
3	VO	Contrast adjust
4	RS	Register select
5	R/W	H: Read; L: Write
6	E	Enable signal
7	DB0	DATA BUS 0
8	DB1	DATA BUS 1
9	DB2	DATA BUS 2
10	DB3	DATA BUS 3
11	DB4	DATA BUS 4
12	DB5	DATA BUS 5
13	DB6	DATA BUS 6
14	DB7	DATA BUS 7
15	CS1	Chip select for IC1. "H" active
16	CS2	Chip select for IC2. "H" active
17	/RST	Reset signal
18	VEE	Negative power output
19	A	Backlight (+) +5V
20	K	Backlight (-)

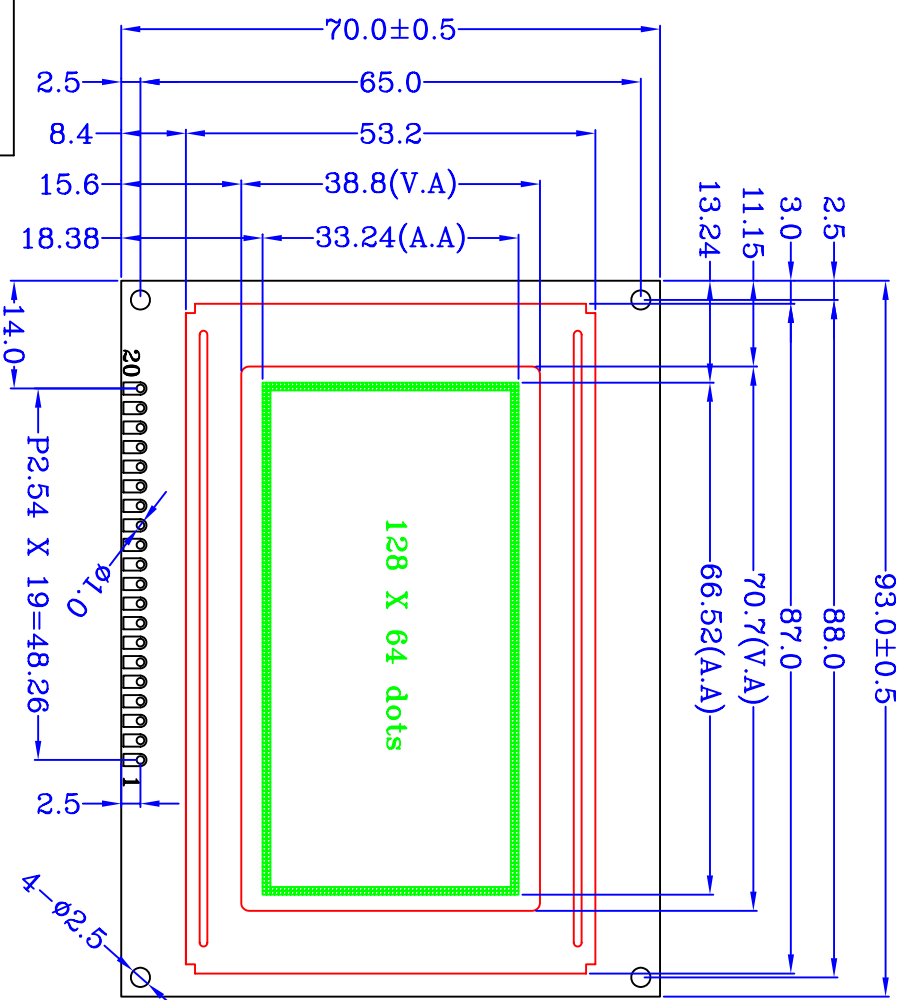

- NOTES:
1. DISPLAY TYPE: STN, YELLOW-GREEN
 2. POLARIZER TYPE: TRANSPARENT, POSITIVE
 3. VIEW DIRECTION: 6:00
 4. OPERATING TEMPERATURE: -20°C~+70°C
 5. STORAGE TEMPERATURE: -30°C~+80°C
 6. VDD: +5V
 7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
 8. CONTROLLER: SBNO064 OR EQUIVALENT
 9. BACKLIGHT TYPE: YELLOW-GREEN
 10. BACKLIGHT SUPPLY VOLTAGE: +5.0V
 11. VOP: TBD

WAYING (HONGKONG) SHARES LIMITED		DESIGN:	MODEL NUMBER:	UNITS:	MM	
		CHECK:	WYM12864D	VERSION:	A	
APPROVE:		SHEET:	1 OF 1			
Unspecified tolerances are ±0.3					DATE:	2005-07-08