



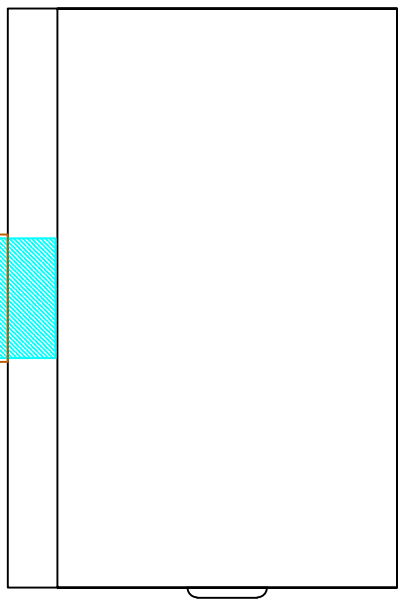
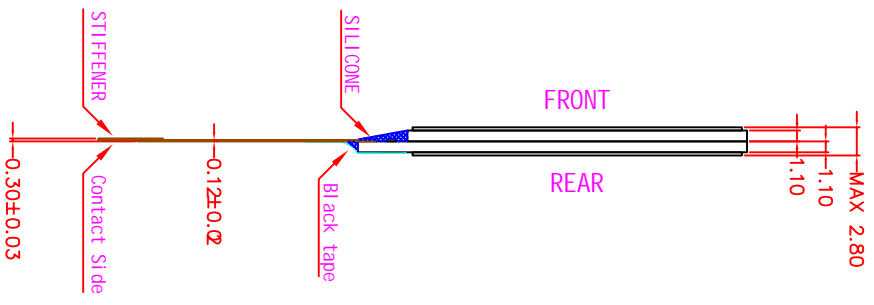


VER	DETAIL DESCRIPTION	DATE
△	The First Amendment	2017-06-01

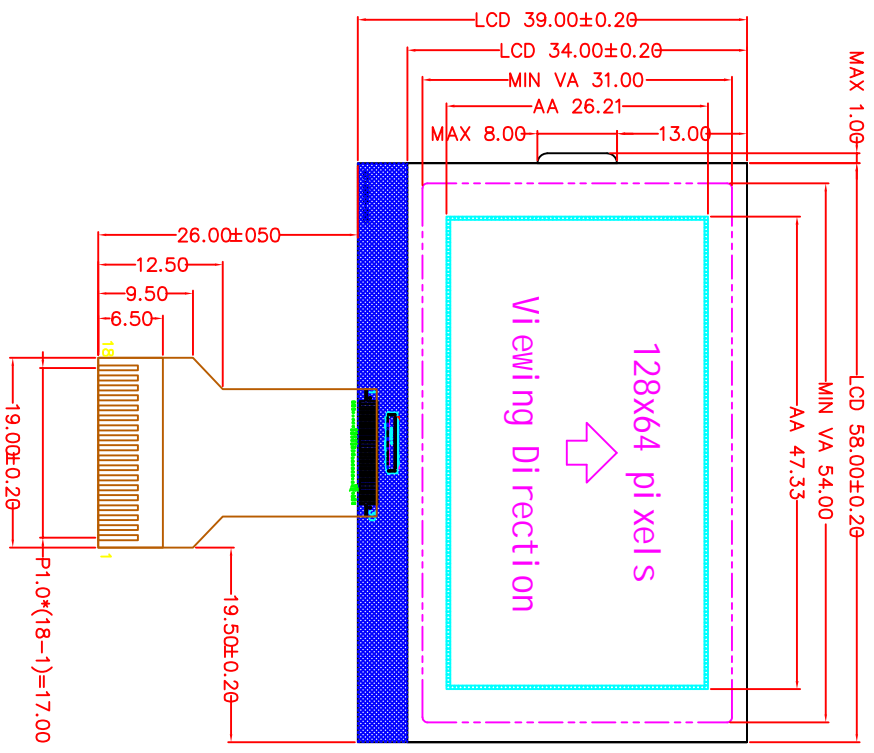

PIN ASSIGNMENT	Example: SPI/IF/IF
1 CS1B	P3.0
2 RST	P3.1
3 A0	P3.2
4 D0/GND	P1.6
5 D7/SMD	P1.7
6 VDD	+3.0V
7 VSS	
8 VDDIF	
9 CSF	
10 C1M	
11 C1P	
12 C2P	
13 C2M	
14 V4	
15 V3	
16 V2	
17 V1	
18 V0	

- NOTES:
- 1.DISPLAY TYPE: FSTN/TRANSFLECTIVE/POSITIVE
 - 2.VIEWING DIRECTION: 6:00
 - 3.IC: ST7565R
 - 4.OPERATING TEMP: -20°C--+70°C
 - 5.STORAGE TEMP: -30°C--+80°C
 - 6.Drive Method: 1/6Subty 1/9bias
 - 7.OPERATING VOLTAGE: VDD=3.0V, VLCD=9.0V
 - 8.BACK LIGHT: WITHOUT
 - 9.CONNECTOR: CDDG/FPC
 - 10.UNMARKED TOLERANCES: ±0.2mm
 - 11.REQUIREMENT ON ENVIRONMENTAL PROTECTION: RoHS

客户确认签名/
Customer signature

SCALE:10:1

名称				FOG 工程图	
编号				WYM12864K21G	
版本				1.0	
绘图				PGY	
审批				HWX	
日期				2017-06-01	
SHEET				1/1	
GEN. TOL				±0.20	
PRO(3)				☞	